



**QUALITY :** METAL USED IN THE MANUFACTURE OF CASTINGS CONFORM TO ASTM 126 CLASS B  
 : THREADS COMPLY WITH THE REQUIREMENTS OF TIS. 281-2532  
 : HOT DIP-GALVANIZED COMPLY WITH THE REQUIREMENTS OF ASTM A153  
 THICKNESS 86 MICRONS

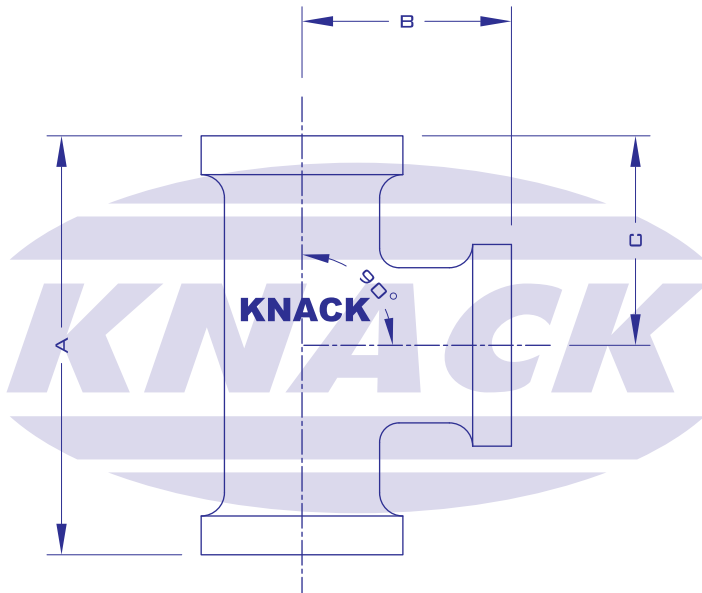

**MODEL**

**T-BRANCHES**

Pipe Size Inch	A	B	C
1 1/2	97	46	49
2	115	59	58
3	157	76	79
4	191	94	96
6	250	124	125
8			
2 by 1 1/2	103	55	52
2 1/2 by 1 1/2	124	64	62
2 1/2 by 2	124	66	62
3 by 1 1/2	126	75	63
3 by 2	127	74	64
3 by 2 1/2	143	75	72
4 by 2	137	89	69
4 by 2 1/2	155	91	78
4 by 3	168	91	84

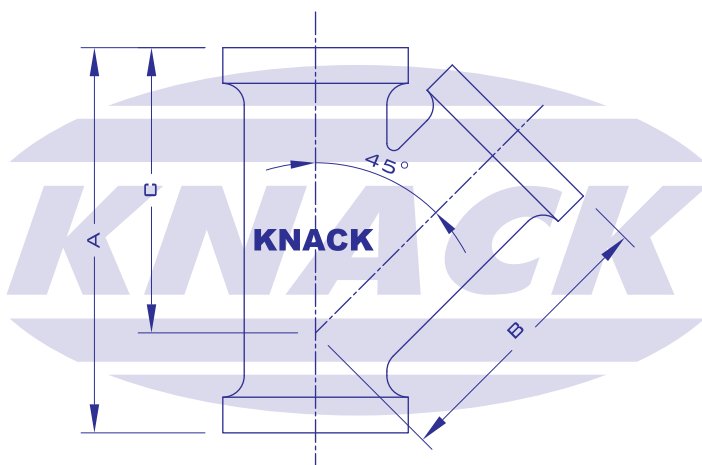

**MODEL**

**Y-BRANCHES**

Pipe Size Inch	A	B	C
1 1/2	132	96	96
2	148	110	110
2 1/2	174	133	130
3	193	144	144
4	248	189	189
6	345	269	269
2 by 1 1/2	126	100	98
2 1/2 by 1 1/2	162	128	127
2 1/2 by 2	158	127	123
3 by 1 1/2	145	128	123
3 by 2	170	141	137
3 by 2 1/2	172	135	132
4 by 2	165	155	145
4 by 2 1/2	181	157	149
4 by 3	197	163	157
5 by 2	244	206	200
6 by 2	179	202	179
6 by 3	227	221	206
6 by 4	265	237	227
8 by 4	280	280	259
8 by 6	360	312	303