



QUALITY : METAL USED IN THE MANUFACTURE OF CASTINGS CONFORM TO ASTM 126 CLASS B
 : THREADS COMPLY WITH THE REQUIREMENTS OF TIS. 281-2532
 : HOT DIP-GALVANIZED COMPLY WITH THE REQUIREMENTS OF ASTM A153
 THICKNESS 86 MICRONS

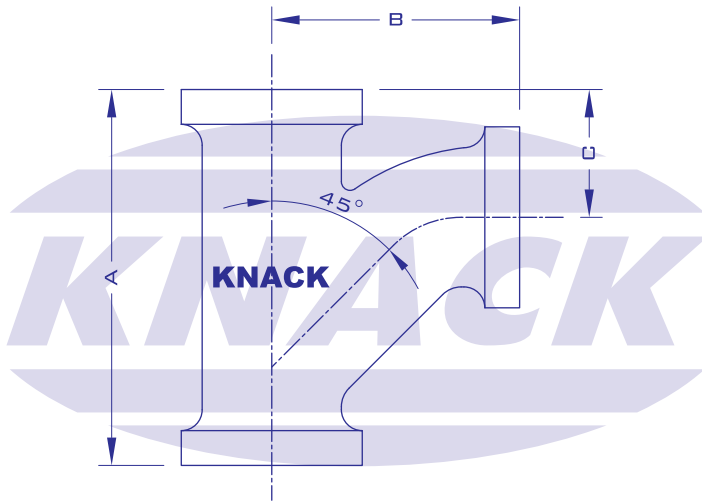

MODEL

TY-BRANCHES

Pipe Size Inch	A	B	C
1 1/2	120	83	36
2	141	96	44
2 1/2	170	118	52
3	198	140	58
4	237	161	75
6	328	225	103
8	410	277	132
2 by 1 1/2	125	90	38
2 1/2 by 2	160	107	50
3 by 1 1/2	157	115	40
3 by 2	165	123	47
3 by 2 1/2	179	131	52
4 by 1 1/2	162	119	52
4 by 2	165	126	54
4 by 2 1/2	190	140	60
4 by 3	202	150	62
6 by 2	178	178	41
6 by 3	230	196	59
6 by 4	255	200	75
8 by 4	275	241	73
8 by 6	345	260	103

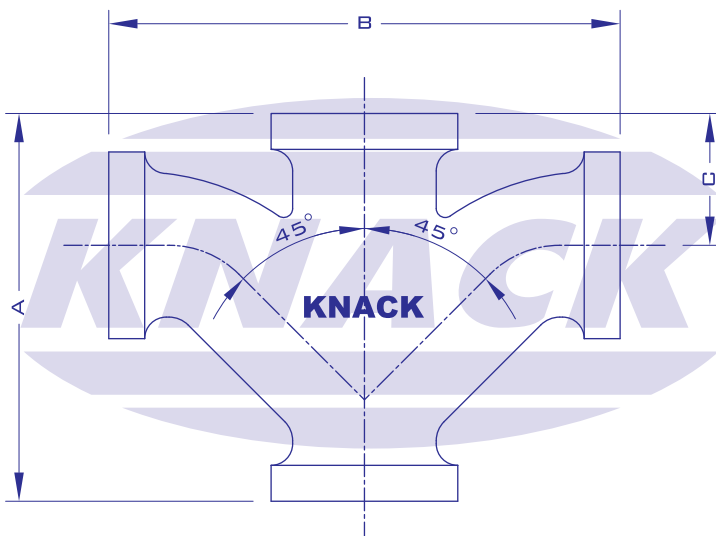

MODEL

DOUBLE TY-BRANCHES

Pipe Size Inch	A	B	C
2	140	181	41
2 1/2	160	204	54
3	196	273	59
4	261	344	86
6	310	405	106
8			
2 by 1 1/2	118	162	38
2 1/2 by 2	163	230	48
3 by 2	165	245	49
4 by 2	168	250	56
4 by 2 1/2	186	250	63
6 by 2	178	359	46