


## DIMENSION IN MM.

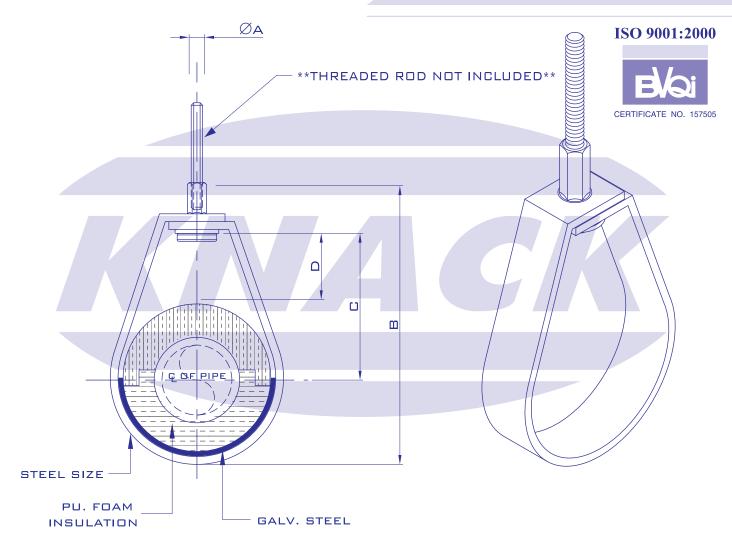

## FIGURE H 521-N ADJUSTABLE SWIVEL RING (P.U.FOAM INSULATION)

**MATERIAL** : CARBON STEEL

FINISH : PLAIN, PAINT, ELECTRO - GAVANIZED, HOT DIP - GAVANIZED CONFORMS WITH : SPECIFICATION WW-H-171E (TYPE 10) MSS SP-69

NOMINAL PIPE SIZE		ROD SIZE A		В	С	Adjustment	Steel Size	Insulation
INCH	MM.	INCH	MM.			D		Thickness
1/2	15	3/8	9.5	104	57	28	1.5 x 25	18
3/4	20	3/8	9.5	119	69	37	1.5 x 25	18
1	25	3/8	9.5	122	69	34	1.5 x 25	18
1 1/4	32	3/8	9.5	138	80	41	1.5 x 25	18
1 1/2	40	3/8	9.5	141	80	38	1.8 x 25	18
2	50	3/8	9.5	148	80	32	1.8 x 25	18
2 1/2	65	3/8	9.5	169	91	35	2.3 x 25	18
3	80	3/8	9.5	195	110	48	2.3 x 25	18
3 1/2	90	3/8	9.5	212	121	52	2.3 x 25	18
4	100	3/8	9.5	232	134	59	2.3 x 32	18
5	125	1/2	12.7	267	149	61	3 x 32	18
6	150	1/2	12.7	301	169	69	3 x 38	18
8	200	1/2	12.7	375	215	89	4 x 38	18